

Technical data sheet

DURAOIST 3POD Tripod ref 1034430

Description :

A single 3Pod solution adjusted to various confined space work situations which is easy to transport and rapid to install.

Adapted to any manholes from 1m, 1m50 to 2m50.

Tested for 2 persons (up to 140 kg each) equipped with 4 anchorage points located on its head as well as 2 pulley fixed on the legs.



HONEYWELL FALL PROTECTION FRANCE SAS

35-37 rue de la Bidauderie

F - 18100 Vierzon - France

Tel : +33 2 48 52 40 40

Fax : +33 2 48 71 04 97

Web site : www.honeywellsafety.com

Features:

Material: aluminium.

4 anchorage points.

Foot sole: rubber piece ribbed (screwed).

Detent pin (diam 10) with metallic attachment sling

Graving identification (lazer) marking + QR code.

Leg length adjustable: 4 positions every 25cm + laser marking

Unique opening / fixation mechanism placed in the head of the tripod:
all legs open simultaneously, 1 knob fixing all legs together (patented).



3 opening angles (diameter of the circle) : 1,40 m – 1,80 m – 2,90 m

Dimension once fully folded for transport: 1,45 m high.

Red webbing at feet level: only when maximum opening (2,5 m manhole).

Legs length ajustements with :

- End-stop to block leg at maximum length.
- Engrave marking to ease the height adjustment of the leg.

Breaking strength: 12 KN

Weight: 16,5 KG NET


Rapid installation of accessories.

Robust leg design :

- Ergonomic legs profile for better hand grip.
- Leg that resists to fall test without feet webbing when opening at 1m and 1m50



Delivered in it packing with handles: dim. 151,5 x 34,5 x 32 cm

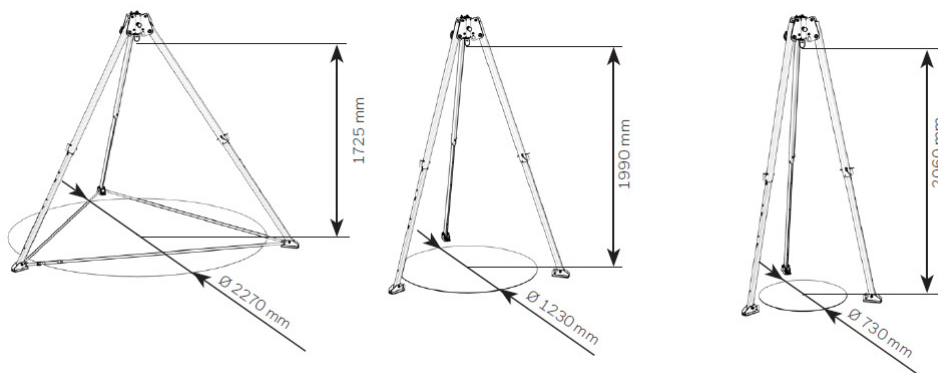

HONEYWELL FALL PROTECTION FRANCE SAS

35-37 rue de la Bidauderie

F - 18100 Vierzon - France

Tel : +33 2 48 52 40 40

Fax : +33 2 48 71 04 97

Web site : www.honeywellsafety.com