

## Universal Commander™ Pads #GPF200S - 15" x 19", 200 pads/package



Durable FineFiber mat performs all around the workplace.

- Most popular mat pad and the most versatile for use in industries with wet processes
- Best used around machinery, in production areas and under assembly lines and conveyors, and in areas with moderate foot traffic
- 3-ply construction is strong and absorbent to take command of leaks and spills
- Available in gray

### GPF200S Specifications

<b>Dimensions:</b>	15" W x 19" L
<b>Shipping Dimensions:</b>	17" W x 19" L x 15" H
<b>Sold as:</b>	200 pads per package
<b>Color:</b>	Gray
<b>Composition:</b>	Polypropylene
<b>Absorbency:</b>	Up to 28.1 gal. per package
<b>Absorbency per:</b>	Up to 17.98 oz. per pad
<b>Weight:</b>	14.7 lbs.
<b># per Pallet:</b>	30
<b>Basis Weight:</b>	SingleWeight
<b>Incinerable:</b>	Yes
<b>Ship Class:</b>	175

### Metric Equivalent Specifications

<b>Dimensions:</b>	38.1cm W x 48.3cm L
<b>Shipping Dimensions:</b>	43.2cm W x 48.3cm L x 38.1cm H
<b>Absorbency:</b>	Up to 106.4 L per package
<b>Absorbency per:</b>	Up to 531.7 mL per pad
<b>Weight:</b>	6.7 kg

## GPF200S Technical Information

### Warnings & Restrictions:

There are no known warnings and restrictions for this product.

### Regulations and Compliance:

49 CFR 173.3(c)(2) - The area between a container and a salvage drum used for overpacking must have "sufficient cushioning and absorption material to prevent excessive movement of the damaged package and to eliminate the presence of any free liquid at the time the salvage drum is closed."

29 CFR 1910.22(a)(2) - Floors in your workplace should be, "maintained in a clean and, so far as possible, a dry condition."

29 CFR 1910.1450(e) - OSHA requires containment and cleanup materials for spills in laboratories to reduce occupational exposure to hazardous chemicals.

29 CFR 1910.120(j)(1) - Under an OSHA requirement, "DOT-specified salvage drums or containers and suitable quantities of proper absorbents shall be kept available and used in areas where spills, leaks, or ruptures may occur."

29 CFR 1910.107(g)(2) - OSHA requires spraying areas to be "kept as free from the accumulation of deposits of combustible residues as practical."

29 CFR 1910.107(b)(3) - If floors in a spray booth or work area are combustible, they "shall be covered with noncombustible material of such character as to facilitate the safe cleaning and removal of residues."

### Technical Documents:

(Available at [spilltech.com](http://spilltech.com))

Product Data Sheet (PDS)

Safety Data Sheet (SDS)

Chemical Compatibility (CCG)



**SpillTech**

Online:  
[spilltech.com](http://spilltech.com)

Phone:  
**1-800-228-3877 (N.Am.)**  
**1-770-475-3877 (Other)**

Fax:  
**1-800-872-3764 (N.Am.)**  
**1-770-410-1812 (Other)**

Email:  
[sales@spilltech.com](mailto:sales@spilltech.com)

## Oil-Only Commander™ Pads #WPF100H-BX - 15" x 19", 100 pads/package



Durable FineFiber mat controls oil under machines and conveyors

- Most popular mat used in industrial cleanup applications
- Use near machinery, in production areas and under assembly lines and conveyors
- 3-ply construction is strong and absorbent to take command of leaks and spills and good for foot traffic
- Perforations allow you to tear pads into different sizes based on your application
- Oil selective — repels water but absorbs oil and all oil-based fluids
- Packaged in a convenient dispenser box

### WPF100H-BX Specifications

<b>Dimensions:</b>	15" W x 19" L
<b>Shipping Dimensions:</b>	15.25" W x 19.25" L x 16.75" H
<b>Sold as:</b>	100 pads per package
<b>Color:</b>	White
<b>Composition:</b>	Polypropylene
<b>Absorbency:</b>	Up to 26.3 gal. per package
<b>Absorbency per:</b>	Up to 33.66 oz. per pad
<b>Weight:</b>	15.8 lbs.
<b># per Pallet:</b>	30
<b>Basis Weight:</b>	HeavyWeight
<b>Incinerable:</b>	Yes
<b>Ship Class:</b>	175

### Metric Equivalent Specifications

<b>Dimensions:</b>	38.1cm W x 48.3cm L
<b>Shipping Dimensions:</b>	38.7cm W x 48.9cm L x 42.5cm H
<b>Dimensions:</b>	
<b>Absorbency:</b>	Up to 99.5 L per package
<b>Absorbency per:</b>	Up to 995.3 mL per pad
<b>Weight:</b>	7.2 kg

## WPF100H-BX Technical Information

### Warnings & Restrictions:

There are no known warnings and restrictions for this product.

### Regulations and Compliance:

49 CFR 173.3(c)(2) - The area between a container and a salvage drum used for overpacking must have "sufficient cushioning and absorption material to prevent excessive movement of the damaged package and to eliminate the presence of any free liquid at the time the salvage drum is closed."

29 CFR 1910.22(a)(2) - Floors in your workplace should be, "maintained in a clean and, so far as possible, a dry condition."

29 CFR 1910.1450(e) - OSHA requires containment and cleanup materials for spills in laboratories to reduce occupational exposure to hazardous chemicals.

29 CFR 1910.120(j)(1) - Under an OSHA requirement, "DOT-specified salvage drums or containers and suitable quantities of proper absorbents shall be kept available and used in areas where spills, leaks, or ruptures may occur."

29 CFR 1910.107(g)(2) - OSHA requires spraying areas to be "kept as free from the accumulation of deposits of combustible residues as practical."

29 CFR 1910.107(b)(3) - If floors in a spray booth or work area are combustible, they "shall be covered with noncombustible material of such character as to facilitate the safe cleaning and removal of residues."

### Technical Documents:

(Available at [spilltech.com](http://spilltech.com))

Product Data Sheet (PDS)

Safety Data Sheet (SDS)



**SpillTech**

Online:  
[spilltech.com](http://spilltech.com)

Phone:  
**1-800-228-3877 (N.Am.)**  
**1-770-475-3877 (Other)**

Fax:  
**1-800-872-3764 (N.Am.)**  
**1-770-410-1812 (Other)**

Email:  
[sales@spilltech.com](mailto:sales@spilltech.com)

## Oil-Only Commander™ Pads #WPF200S - 15" x 19", 200 pads/package



Durable FineFiber mat controls oil under machines and conveyors

- Most popular mat used in industrial cleanup applications
- Use near machinery, in production areas and under assembly lines and conveyors
- 3-ply construction is strong and absorbent to take command of leaks and spills and good for foot traffic
- Perforations allow you to tear pads into different sizes based on your application
- Oil selective — repels water but absorbs oil and all oil-based fluids

### WPF200S Specifications

<b>Dimensions:</b>	15" W x 19" L
<b>Shipping Dimensions:</b>	17" W x 19" L x 15" H
<b>Sold as:</b>	200 pads per package
<b>Color:</b>	White
<b>Composition:</b>	Polypropylene
<b>Absorbency:</b>	Up to 28.1 gal. per package
<b>Absorbency per:</b>	Up to 17.98 oz. per pad
<b>Weight:</b>	14.7 lbs.
<b># per Pallet:</b>	30
<b>Basis Weight:</b>	SingleWeight
<b>Incinerable:</b>	Yes
<b>Ship Class:</b>	175

### Metric Equivalent Specifications

<b>Dimensions:</b>	38.1cm W x 48.3cm L
<b>Shipping Dimensions:</b>	43.2cm W x 48.3cm L x 38.1cm H
<b>Absorbency:</b>	Up to 106.4 L per package
<b>Absorbency per:</b>	Up to 531.7 mL per pad
<b>Weight:</b>	6.7 kg

## WPF200S Technical Information

### Warnings & Restrictions:

There are no known warnings and restrictions for this product.

### Regulations and Compliance:

49 CFR 173.3(c)(2) - The area between a container and a salvage drum used for overpacking must have "sufficient cushioning and absorption material to prevent excessive movement of the damaged package and to eliminate the presence of any free liquid at the time the salvage drum is closed."

29 CFR 1910.22(a)(2) - Floors in your workplace should be, "maintained in a clean and, so far as possible, a dry condition."

29 CFR 1910.1450(e) - OSHA requires containment and cleanup materials for spills in laboratories to reduce occupational exposure to hazardous chemicals.

29 CFR 1910.120(j)(1) - Under an OSHA requirement, "DOT-specified salvage drums or containers and suitable quantities of proper absorbents shall be kept available and used in areas where spills, leaks, or ruptures may occur."

29 CFR 1910.107(g)(2) - OSHA requires spraying areas to be "kept as free from the accumulation of deposits of combustible residues as practical."

29 CFR 1910.107(b)(3) - If floors in a spray booth or work area are combustible, they "shall be covered with noncombustible material of such character as to facilitate the safe cleaning and removal of residues."

### Technical Documents:

(Available at [spilltech.com](http://spilltech.com))

Product Data Sheet (PDS)

Safety Data Sheet (SDS)



**SpillTech**

Online:  
[spilltech.com](http://spilltech.com)

Phone:  
**1-800-228-3877 (N.Am.)**  
**1-770-475-3877 (Other)**

Fax:  
**1-800-872-3764 (N.Am.)**  
**1-770-410-1812 (Other)**

Email:  
[sales@spilltech.com](mailto:sales@spilltech.com)

## Oil-Only Commander™ Roll #WRF150H - 30" x 150', 1 roll/package



Durable FineFiber mat controls oil under machines and conveyors

- Most popular mat used in industrial cleanup applications
- Use near machinery, in production areas and under assembly lines and conveyors
- 3-ply construction is strong and absorbent to take command of leaks and spills and good for foot traffic
- Rolls are ideal for covering large areas
- Perforations allow you to tear rolls into different sizes based on your application
- Oil selective — repels water but absorbs oil and all oil-based fluids

### WRF150H Specifications

<b>Dimensions:</b>	30" W x 150' L
<b>Shipping Dimensions:</b>	17" W x 30" L x 17" H
<b>Sold as:</b>	1 roll per package
<b>Color:</b>	White
<b>Composition:</b>	Polypropylene
<b>Absorbency:</b>	Up to 49.8 gal. per package
<b>Weight:</b>	25.6 lbs.
<b># per Pallet:</b>	15
<b>Basis Weight:</b>	HeavyWeight
<b>Incinerable:</b>	Yes
<b>Ship Class:</b>	175

### Metric Equivalent Specifications

<b>Dimensions:</b>	76.2cm W x 46m L
<b>Shipping Dimensions:</b>	43.2cm W x 76.2cm L x 43.2cm H
<b>Absorbency:</b>	Up to 188.5 L per package
<b>Weight:</b>	11.6 kg

## WRF150H Technical Information

### Warnings & Restrictions:

There are no known warnings and restrictions for this product.

### Regulations and Compliance:

49 CFR 173.3(c)(2) - The area between a container and a salvage drum used for overpacking must have "sufficient cushioning and absorption material to prevent excessive movement of the damaged package and to eliminate the presence of any free liquid at the time the salvage drum is closed."

29 CFR 1910.22(a)(2) - Floors in your workplace should be, "maintained in a clean and, so far as possible, a dry condition."

29 CFR 1910.1450(e) - OSHA requires containment and cleanup materials for spills in laboratories to reduce occupational exposure to hazardous chemicals.

29 CFR 1910.120(j)(1) - Under an OSHA requirement, "DOT-specified salvage drums or containers and suitable quantities of proper absorbents shall be kept available and used in areas where spills, leaks, or ruptures may occur."

29 CFR 1910.107(g)(2) - OSHA requires spraying areas to be "kept as free from the accumulation of deposits of combustible residues as practical."

29 CFR 1910.107(b)(3) - If floors in a spray booth or work area are combustible, they "shall be covered with noncombustible material of such character as to facilitate the safe cleaning and removal of residues."

### Technical Documents:

(Available at [spilltech.com](http://spilltech.com))

Product Data Sheet (PDS)

Safety Data Sheet (SDS)




Phone:  
**1-800-228-3877 (N.Am.)**  
**1-770-475-3877 (Other)**

Fax:  
**1-800-872-3764 (N.Am.)**  
**1-770-410-1812 (Other)**

Email:  
[sales@spilltech.com](mailto:sales@spilltech.com)



## HazMat Defender™ Pads #YPB100H - 15" x 19", 100 pads/package

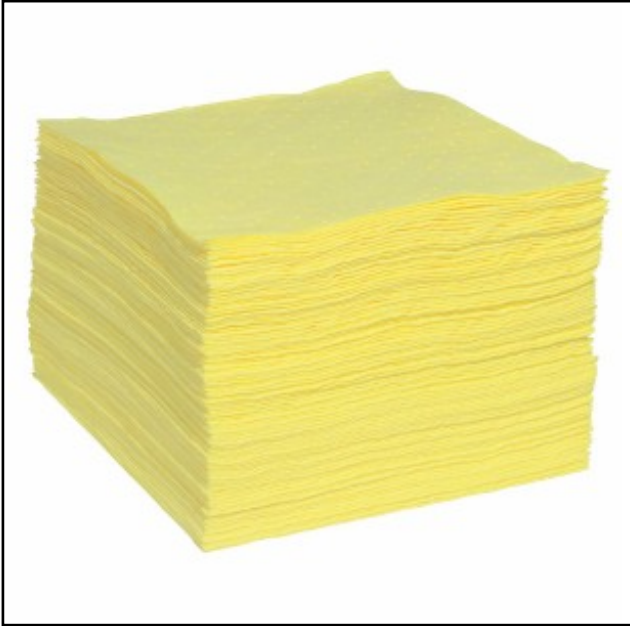

Economical choice for quick, efficient response to spills of hazardous or unknown liquids.

- Economical mat pad for aggressive chemical spills or unknown liquids
- 100% polypropylene mat is chemically compatible with most liquids
- Color-coded in cautionary yellow for quick identification
- Use for spill cleanup in university and research labs, hospitals, chemical or pharmaceutical plants and other facilities that use hazardous liquids

### YPB100H Specifications

<b>Dimensions:</b>	15" W x 19" L
<b>Shipping Dimensions:</b>	16" W x 19" L x 15" H
<b>Sold as:</b>	100 pads per package
<b>Color:</b>	Yellow
<b>Composition:</b>	Polypropylene
<b>Absorbency:</b>	Up to 29.1 gal. per package
<b>Absorbency per:</b>	Up to 37.25 oz. per pad
<b>Weight:</b>	13 lbs.
<b># per Pallet:</b>	30
<b>Basis Weight:</b>	HeavyWeight
<b>Incinerable:</b>	Yes
<b>Ship Class:</b>	175

### Metric Equivalent Specifications

<b>Dimensions:</b>	38.1cm W x 48.3cm L
<b>Shipping Dimensions:</b>	40.6cm W x 48.3cm L x 38.1cm H
<b>Absorbency:</b>	Up to 110.1 L per package
<b>Absorbency per:</b>	Up to 1.1 L per pad
<b>Weight:</b>	5.9 kg

## YPB100H Technical Information

### Warnings & Restrictions:

There are no known warnings and restrictions for this product.

### Regulations and Compliance:

49 CFR 173.3(c)(2) - The area between a container and a salvage drum used for overpacking must have "sufficient cushioning and absorption material to prevent excessive movement of the damaged package and to eliminate the presence of any free liquid at the time the salvage drum is closed."

40 CFR 263.31 - Transporters, "must clean up any hazardous waste discharge that occurs during transportation...so that the hazardous waste discharge no longer presents a hazard to human health or the environment."

29 CFR 1910.1450(e) - OSHA requires containment and cleanup materials for spills in laboratories to reduce occupational exposure to hazardous chemicals.

29 CFR 1910.120(j)(1) - Under an OSHA requirement, "DOT-specified salvage drums or containers and suitable quantities of proper absorbents shall be kept available and used in areas where spills, leaks, or ruptures may occur."

### Technical Documents:

(Available at [spilltech.com](http://spilltech.com))

Product Data Sheet (PDS)

Safety Data Sheet (SDS)

Chemical Compatibility (CCG)



**SpillTech**


Online:  
[spilltech.com](http://spilltech.com)

Phone:  
**1-800-228-3877 (N.Am.)**  
**1-770-475-3877 (Other)**

Fax:  
**1-800-872-3764 (N.Am.)**  
**1-770-410-1812 (Other)**

Email:  
[sales@spilltech.com](mailto:sales@spilltech.com)

## HazMat Defender™ Pads #YPB200S - 15" x 19", 200 pads/package

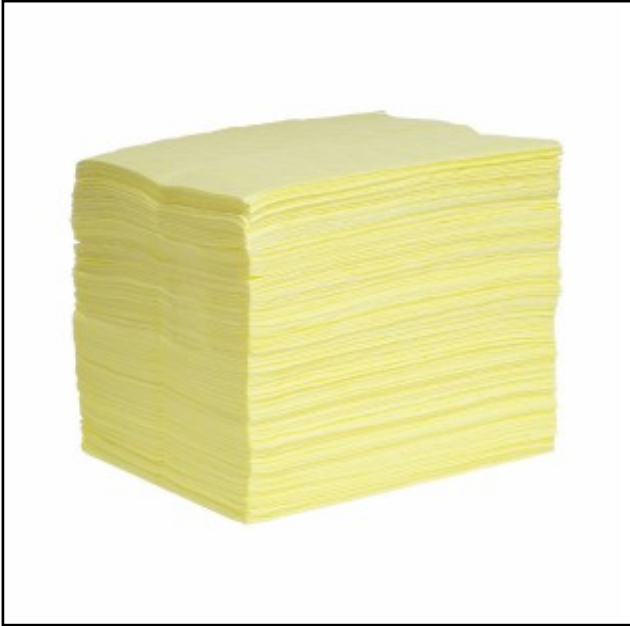

Economical choice for quick, efficient response to spills of hazardous or unknown liquids.

- Economical mat pad for aggressive chemical spills or unknown liquids
- 100% polypropylene mat is chemically compatible with most liquids
- Color-coded in cautionary yellow for quick identification
- Use for spill cleanup in university and research labs, hospitals, chemical or pharmaceutical plants and other facilities that use hazardous liquids

### YPB200S Specifications

<b>Dimensions:</b>	15" W x 19" L
<b>Shipping Dimensions:</b>	17" W x 19" L x 15" H
<b>Sold as:</b>	200 pads per package
<b>Color:</b>	Yellow
<b>Composition:</b>	Polypropylene
<b>Absorbency:</b>	Up to 31.1 gal. per package
<b>Absorbency per:</b>	Up to 19.9 oz. per pad
<b>Weight:</b>	14.7 lbs.
<b># per Pallet:</b>	30
<b>Basis Weight:</b>	SingleWeight
<b>Incinerable:</b>	Yes
<b>Ship Class:</b>	175

### Metric Equivalent Specifications

<b>Dimensions:</b>	38.1cm W x 48.3cm L
<b>Shipping Dimensions:</b>	43.2cm W x 48.3cm L x 38.1cm H
<b>Absorbency:</b>	Up to 117.7 L per package
<b>Absorbency per:</b>	Up to 588.4 mL per pad
<b>Weight:</b>	6.7 kg

## YPB200S Technical Information

### Warnings & Restrictions:

There are no known warnings and restrictions for this product.

### Regulations and Compliance:

49 CFR 173.3(c)(2) - The area between a container and a salvage drum used for overpacking must have "sufficient cushioning and absorption material to prevent excessive movement of the damaged package and to eliminate the presence of any free liquid at the time the salvage drum is closed."

40 CFR 263.31 - Transporters, "must clean up any hazardous waste discharge that occurs during transportation...so that the hazardous waste discharge no longer presents a hazard to human health or the environment."

29 CFR 1910.1450(e) - OSHA requires containment and cleanup materials for spills in laboratories to reduce occupational exposure to hazardous chemicals.

29 CFR 1910.120(j)(1) - Under an OSHA requirement, "DOT-specified salvage drums or containers and suitable quantities of proper absorbents shall be kept available and used in areas where spills, leaks, or ruptures may occur."

### Technical Documents:

(Available at [spilltech.com](http://spilltech.com))

Product Data Sheet (PDS)

Safety Data Sheet (SDS)

Chemical Compatibility (CCG)



**SpillTech**

Online:  
[spilltech.com](http://spilltech.com)

Phone:  
**1-800-228-3877 (N.Am.)**  
**1-770-475-3877 (Other)**

Fax:  
**1-800-872-3764 (N.Am.)**  
**1-770-410-1812 (Other)**

Email:  
[sales@spilltech.com](mailto:sales@spilltech.com)