

PRODUCT NUMBER: 1032333
Miller kernmantel restraint lanyard 1 meter with 2 CS20 karabiners

Miller kernmantel restraint lanyard 1 meter with 2 steel screw gate karabiners.



Overview

Reference Number

1032333

Product Type

Fall Protection

Range

Restraint Lanyards

Brand

Miller by Honeywell

Industry

- Building and Construction
- Utilities

Product Use

Restraint lanyards are used to restrict the worker's movement to prevent him reaching a location where a fall hazard exists.

Features & Benefits

Feature

New Design : * The new Kernmantel rope is manufactured with light green rope with black stripes , which are highly visible from a distance increasing the safety at work. * The stitches are highly visible which facilitates the safety check before use.

Benefit

The kernmantel lanyard is 2 times more resistant to the abrasion than a standard rope.

Technical Description

Length

1 M.

Weight

0,420 KG.

Breaking Strength

> 22 KN

Operating Temperature

-30°C to +50°C

Rope**Rope Raw Material**

Kernmantel Ø 11 mm. Polyester sheath and polyamide core

Connector**Connector Type**

Screw gate karabiners

Connector Raw Material

steel

Connector Opening

17 mm

Connector Breaking Strength

> 25 KN

Connector Standard

EN 362 : 2004

Certifications**EU Category PPE**

3

Quality Assurance

ISO 9001 / 2000

EU Certification

EU Attestation

Certifications

- EN 354
- EN 358 : 1999

REACH**EU Regulation 1907/2006 (REACH) Compliance**

The substance(s) listed below may be contained in this product above the threshold level of 0.1% by weight of the listed article.

Product Reference Sold in Europe	Substance > 0.1%
Substance Name	CAS Number
No Substance Content	

Additional Information**User Manual**

NT90004208 IND L

User Information Sheet

User manual

Maintenance

Life Cycle

Life expectancy of our harnesses is 10 years from the date of manufacture.

Care Instructions


Some factors can contribute to reduce the performance or life expectancy of the product:

- Incorrect stocking
- Incorrect use
- Stopping a fall
- Mechanical deformation or cut
- Contact with chemical products (an acid or a base)
- Exposure to extreme heat sources > 60°C
- Exposure to UV rays

Please remember that:

- the product must be checked at least once a year by a qualified person. This inspection must be registered.
- before each use, the product must be visually inspected by the user.

The compulsory annual inspection will be the deciding factor as to whether your PPE should be put back into service or not.

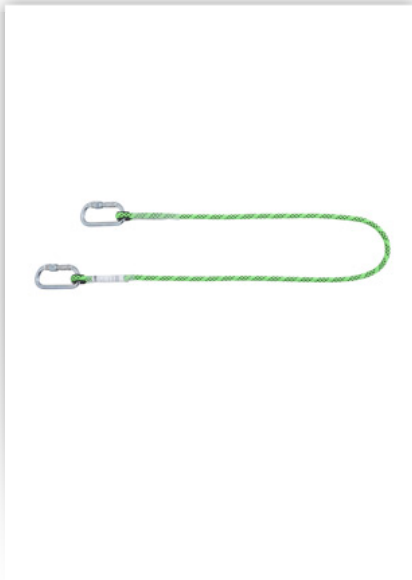

PRODUCT NUMBER: 1032334
Miller kernmantel restraint lanyard 1,5 meters with 2 CS20 karabiners

Miller kernmantel restraint lanyard 1,5 meters with 2 steel screw gate karabiners.



Overview

Reference Number

1032334

Product Type

Fall Protection

Range

Restraint Lanyards

Brand

Miller by Honeywell

Industry

- Building and Construction
- Utilities

Product Use

Restraint lanyards are used to restrict the worker's movement to prevent him reaching a location where a fall hazard exists.

Features & Benefits

Feature

New Design : * The new Kernmantel rope is manufactured with light green rope with black stripes , which are highly visible from a distance increasing the safety at work. * The stitches are highly visible which facilitates the safety check before use.

Benefit

The kernmantel lanyard is 2 times more resistant to the abrasion than a standard rope.

Technical Description

Length

1,5 M.

Weight

0,460 KG.

Breaking Strength

> 22 KN

Operating Temperature

-30°C to +50°C

Rope

Rope Raw Material

Kernmantel Ø 11 mm. Polyester sheath and polyamide core

Connector

Connector Type

Screw gate karabiners

Connector Raw Material

steel

Connector Opening

17 mm

Connector Breaking Strength

> 25 KN

Connector Standard

EN 362 : 2004

Certifications

E.C. Declaration of Conformity

EC Category PPE

3

Quality Assurance

ISO 9001 / 2000

EC Attestation

EC Attestation

EC Attestation Number

0082-490-160-06-13-0167

Certifications

- EN 354
- EN 358 : 1999

REACH

EU Regulation 1907/2006 (REACH) Compliance	
The substance(s) listed below may be contained in this product above the threshold level of 0.1% by weight of the listed article.	
Product Reference Sold in Europe	Substance > 0.1%
Substance Name	CAS Number
No Substance Content	

Additional Information

User Manual

NT90004208 IND L

User Information Sheet

User manual

Maintenance

Life Cycle

Life expectancy of our harnesses is 10 years from the date of manufacture.

Care Instructions

Some factors can contribute to reduce the performance or life expectancy of the product:

- Incorrect stocking
- Incorrect use
- Stopping a fall
- Mechanical deformation or cut
- Contact with chemical products (an acid or a base)
- Exposure to extreme heat sources > 60°C
- Exposure to UV rays

Please remember that:

- the product must be checked at least once a year by a qualified person. This inspection must be registered.
- before each use, the product must be visually inspected by the user.

The compulsory annual inspection will be the deciding factor as to whether your PPE should be put back into service or not.



PRODUCT NUMBER: 1032335
Miller kernmantel restraint lanyard 2 meters with 2 CS20 karabiners

Miller kernmantel restraint lanyard 2 meters with 2 steel screw gate karabiners.



Overview

Reference Number

1032335

Product Type

Fall Protection

Range

Restraint Lanyards

Brand

Miller by Honeywell

Industry

- Building and Construction
- Utilities

Product Use

Restraint lanyards are used to restrict the worker's movement to prevent him reaching a location where a fall hazard exists.

Features & Benefits

Feature

New Design : * The new Kernmantel rope is manufactured with light green rope with black stripes , which are highly visible from a distance increasing the safety at work. * The stitches are highly visible which facilitates the safety check before use.

Benefit

The kernmantel lanyard is 2 times more resistant to the abrasion than a standard rope.

Technical Description

Length

2 M.

Weight

0,500 KG.

Breaking Strength

> 22 KN

Operating Temperature

-30°C to +50°C

Rope

Rope Raw Material

Kernmantel Ø 11 mm. Polyester sheath and polyamide core

Connector

Connector Type

Screw gate karabiners

Connector Raw Material

steel

Connector Opening

17 mm

Connector Breaking Strength

> 25 KN

Connector Standard

EN 362 : 2004

Certifications

E.C. Declaration of Conformity

EC Category PPE

3

Quality Assurance

ISO 9001 / 2000

EC Attestation

EC Attestation

EC Attestation Number

0082-490-160-06-13-0167

Certifications

- EN 354
- EN 358 : 1999

REACH

EU Regulation 1907/2006 (REACH) Compliance	
The substance(s) listed below may be contained in this product above the threshold level of 0.1% by weight of the listed article.	
Product Reference Sold in Europe	Substance > 0.1%
Substance Name	CAS Number
No Substance Content	

Additional Information

User Manual

NT90004208 IND L

User Information Sheet

User manual

Maintenance

Life Cycle

Life expectancy of our harnesses is 10 years from the date of manufacture.

Care Instructions


Some factors can contribute to reduce the performance or life expectancy of the product:

- Incorrect stocking
- Incorrect use
- Stopping a fall
- Mechanical deformation or cut
- Contact with chemical products (an acid or a base)
- Exposure to extreme heat sources > 60°C
- Exposure to UV rays

Please remember that:

- the product must be checked at least once a year by a qualified person. This inspection must be registered.
- before each use, the product must be visually inspected by the user.

The compulsory annual inspection will be the deciding factor as to whether your PPE should be put back into service or not.

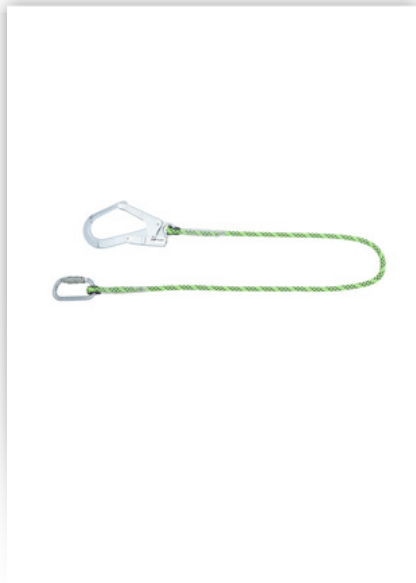

PRODUCT NUMBER: 1032339
Miller kernmantel restraint lanyard 1 meter with a twist lock karabiner and a GO55 scaffold hook

Miller kernmantel single restraint lanyard 1 meter with a steel twist lock karabiner and a GO55 steel scaffold hook.



Overview

Reference Number

1032339

Product Type

Fall Protection

Range

Restraint Lanyards

Brand

Miller by Honeywell

Industry

- Building and Construction
- Utilities

Product Use

Restraint lanyards are used to restrict the worker's movement to prevent him reaching a location where a fall hazard exists.

Features & Benefits

Feature

New Design : * The new Kernmantel rope is manufactured with light green rope with black stripes , which are highly visible from a distance increasing the safety at work. * The stitches are highly visible which facilitates the safety check before use.

Benefit

The kernmantel lanyard is 2 times more resistant to the abrasion than a standard rope.

Technical Description

Length

1 M.

Weight

0,780 KG.

Breaking Strength

> 22 KN

Operating Temperature

-30°C to +50°C

Rope

Rope Raw Material

Kernmantel Ø 11 mm. Polyester sheath and polyamide core

Connector

Connector Type

Twist lock karabiner

Connector Raw Material

steel

Connector Opening

17 mm

Connector Breaking Strength

> 22 KN

Connector Standard

EN 362 : 2004

Connector

Connector Type

GO55 scaffold hook

Connector Raw Material

steel

Connector Opening

55 mm

Connector Breaking Strength

> 25 KN

Connector Standard

EN 362 : 2004

Certifications

E.C. Declaration of Conformity

EC Category PPE

3

Quality Assurance

ISO 9001 / 2000

EC Attestation

 EC Attestation

EC Attestation Number

0082-490-160-06-13-0167

Certifications

- EN 354
- EN 358 : 1999

REACH

EU Regulation 1907/2006 (REACH) Compliance

The substance(s) listed below may be contained in this product above the threshold level of 0.1% by weight of the listed article.

Product Reference Sold in Europe	Substance > 0.1%
Substance Name	CAS Number
No Substance Content	

Additional Information

User Manual

NT90004208 IND L

User Information Sheet

User manual

Maintenance

Life Cycle

Life expectancy of our harnesses is 10 years from the date of manufacture.

Care Instructions

Some factors can contribute to reduce the performance or life expectancy of the product:

- Incorrect stocking
- Incorrect use
- Stopping a fall
- Mechanical deformation or cut
- Contact with chemical products (an acid or a base)
- Exposure to extreme heat sources > 60°C
- Exposure to UV rays

Please remember that:

- the product must be checked at least once a year by a qualified person. This inspection must be registered.
- before each use, the product must be visually inspected by the user.

The compulsory annual inspection will be the deciding factor as to whether your PPE should be put back into service or not.



Centre d'Essais de Fontaine
17, Boulevard Paul Langevin
38600 FONTAINE - France
Tél. +33.(0)4.76.53.52.22
Fax +33.(0)4.76.53.32.40
lab38chute@apave.com

En exécution de la directive 89/686/CEE du 21 décembre 1989 modifiée concernant le rapprochement des législations des états membres relatives aux équipements de protection individuelle et des dispositions pertinentes du code du travail, portant transposition de cette directive en droit français,
In enforcement of amended directive 89/686/EEC of 21st of December 1989 on the approximation of the laws of the Members States relating to personal protective equipment and in enforcement of relevant requirements of the French labour code, providing for the transcription of this directive into French regulations,

APAVE SUDEUROPE SAS, organisme notifié, identifié sous le numéro 0082, attribue l'
APAVE SUDEUROPE SAS, notified body, identified under number 0082, awards the

ATTESTATION D'EXAMEN CE DE TYPE

(EC Type examination certificate)

N° 0082/490/160/06/13/0167

A l'équipement suivant :

To the following equipment:

➤ Type d'équipement : **EPI de catégorie III - Longe et Longe de retenue et de maintien au travail**

Category of equipment: PPE category III – Lanyard and Restraint and work positioning lanyard

➤ Marque commerciale : **MILLER®**

Trademark

➤ Equivalence : la présente attestation est attribuée aux deux modèles suivantes :

Equivalence: this certificate is awarded to the two following models:

- Modèle : **LONGE DE RETENUE DRISSE NUE** : Longe simple
Model Single lanyard
- Modèle : **LONGE DE RETENUE DRISSE XM+CONNECTEURS** : Longe simple intégrant des connecteurs
Model Single lanyard integrated connectors

➤ Fabricant : **HONEYWELL FALL PROTECTION France SAS – 35-37 Rue de la Bidauderie – 18100 VIERZON Cedex France**

Manufacturer

➤ Description : Longe fixe simple en cordage avec gaine en polyester et âme en polyamide, de diamètre 11 mm. A chaque extrémité une boucle cousue cossée, soit de référence 90001626, soit 90022716, protégée par une gaine thermoretractable de référence 90002874 ou 90022718. Longe équipée des connecteurs intégrés suivants : 1006452 ou 1018973 ou 1018972 ou 1018977 ou 1009249 ou 1018976 ou 1029701 ou 1004300. Longueur disponible de 0.3 m à 2m (description détaillée dans le rapport d'examen CE de type 13.6.0233).

Description: Single fixe lanyard rope, with sheath in polyester and core in polyamide, diameter 11mm. On each end of lanyard, a sewn thimble buckle, either of reference 90001626 or 90022716 protected by a thermo retractable sheath of reference 90002874 or 90022718. The lanyard can be equipped with integrated connector of reference: 1006452 or 1018973 or 1018972 or 1018977 or 1009249 or 1018976 or 1029701 or 1004300. Available lengths from 0.3m to 2m (detailed description in EC type examination report 13.6.0233).

➤ Référentiels techniques utilisés : EN 354 : 2010 et EN 358 : 1999

Technical referentials used

Date : 6 juin 2013

Date: the 6th June 2013

Document authentifié par tampon sec

Document certified by dry stamp

Le Responsable du Centre d'Essais de Fontaine – Certification EPI

Head of Fontaine Testing Centre – PPE Certification

Vincent MAILLOCHEAU

NOTA : Toute modification apportée au matériel neuf objet de la présente attestation d'examen CE de type doit être portée à la connaissance de l'organisme habilité en application de l'article R4313-38 du code du travail.

Any modification brought about a new equipment covered by this CE type examination certificate must be notified to the body in enforcement of article R4313-38 of French labour code.

Cette attestation comporte une page. Elle est établie en deux exemplaires originaux transmis au demandeur. Aucun duplicata ne sera délivré.

This certificate includes one page. This certificate is edited in two original copies. No duplicate will be issued.

APAVE SUDEUROPE SAS

Siège social : 8 rue Jean-Jacques Vernazza - Z.A.C. Saumaty-Séon - CS 60193 - 13322 MARSEILLE CEDEX 16

Tél. : 04 96 15 22 60 - Fax : 04 96 15 22 61 - Site Internet : www.apave.com

Société par Actions Simplifiée au Capital de 6 648 544 € - N° SIREN : 518 720 925

V01/2013



E.C. Declaration of Conformity

The manufacturer or its legal representative supplier in the European Community:

Honeywell Safety Products Europe

Declares that the Personal Protective Equipment described here after conforms to the provisions of the European Council Directive 89/686/CEE:

Designation: Miller kernmantel restraint lanyard 1 meter with a twist lock karabiner and a GO55 scaffold hook

Reference: 1032339

Standard(s): EN 354, EN358 Serial Number: 20753053/001 Date of purchase: 24.05.2017

This PPE is the object of the below EC examination certificate n°:

0082-490-160-06-13-0167

And is subject to the procedure set out in Article 11 point B of Directive 89/686/EEC under the supervision of the below notified body.

Delivered by:

APAVE SUDEUROPE SAS

BP 3

33370

ARTIGUES près BORDEAUX

France

Drawn up in , on the 26/05/2017

By: Frederic Wagner

Division: Fall Protection

ZI Paris Nord II 33, rue des Vanesses BP 50288 95958 Roissy CDG France

Tel: +33 (0) 49 90 79 79 Fax: +33 (0)1 49 90 79 80

www.honeywellsafety.com